
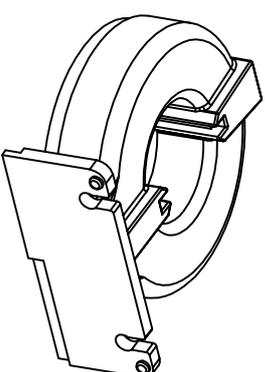
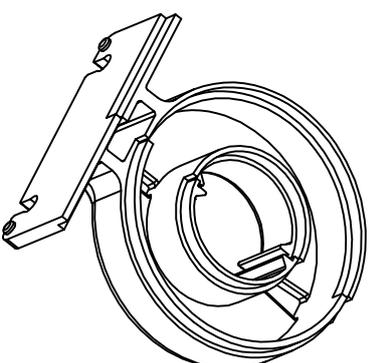
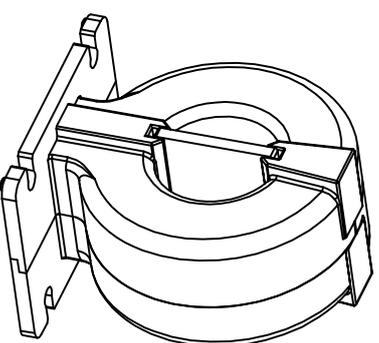
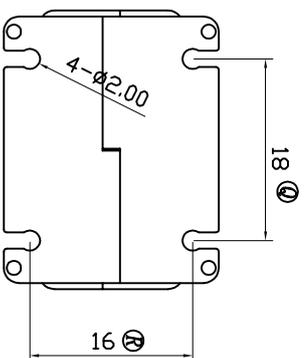
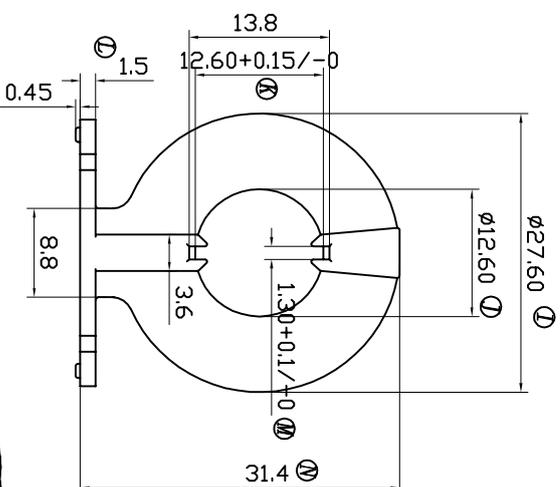
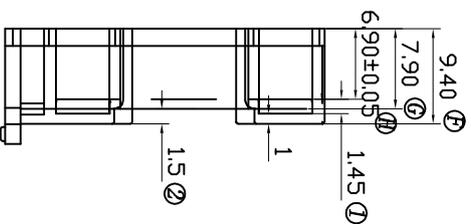
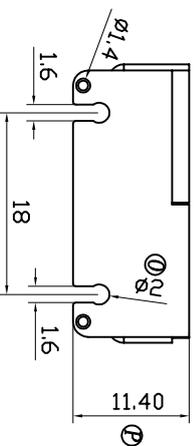


備註說明:

1. 材質: PBT-4130
2. 強度要求: 2.00kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 模具狀況: 量產模
6. HX-C020A與HX-C020B裝配OK

REV	DATE	DESCRIPTION
01	2015-06-12	A尺寸由25.60改為25.20, B尺寸由14.60改為14.70, H尺寸由7.05改為6.95
02	2015-06-26	F尺寸由11.40改為9.40, ①尺寸由3.45改為1.45, ②尺寸由3.50改為1.50
03	2016-12-02	增加擴穴號 "1~8"
04	2016-12-17	取消擴穴號 "1~8"

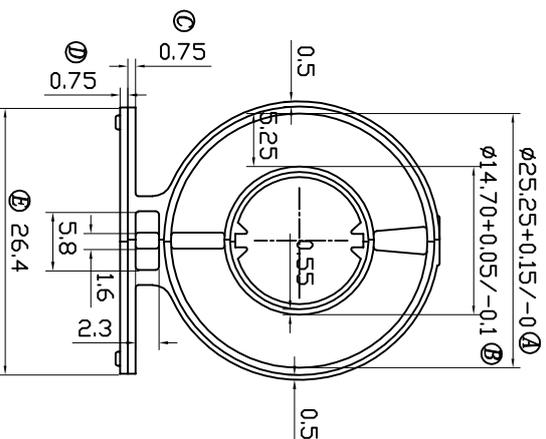

组合图

ROHS

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
±0.2	±0.3	±0.1	±0.1	±0.3	±0.2	±0.2	±0.2	±0.3	±0.2	+0.15 -0	±0.1	+0.1 -0	±0.3	±0.1	±0.2	±0.2	±0.2
25.20	14.70	0.75	0.75	26.40	9.40	7.90	6.95	27.60	12.60	12.60	1.50	1.30	31.40	2.00	11.40	8.00	16.00

NAME	T25X15X12 CASE	MATERIAL	PBT-4130	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX C020A	PIN MATERIAL		UNIT	m/m	REV.	04
TOLERANCE OF PIN PITCH ±0.20		PIN TENSION LOAD kg MIN		UL REC.: 94V0			
TOLERANCE: 0<L<4: ±0.1		4<L<16: ±0.2		16<L<...: ±0.3			
DESIGNED BY	LIN HUA JING	CHECKED BY	LIN GUO PING	DATE:	JUN 26 2016		

东莞市华欣塑胶制品有限公司
DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD.
TEL: 0769-863388188 FAX: 0769-863388111
E-Mail: hxbobbin@vip.163.com