



品番	仕様	図面番号
01	2015/06/12	B尺寸由3.50改为1.50, D尺寸由21.15改为17.15
02	2016/11/16	兩邊增加卡扣0.30*1.30

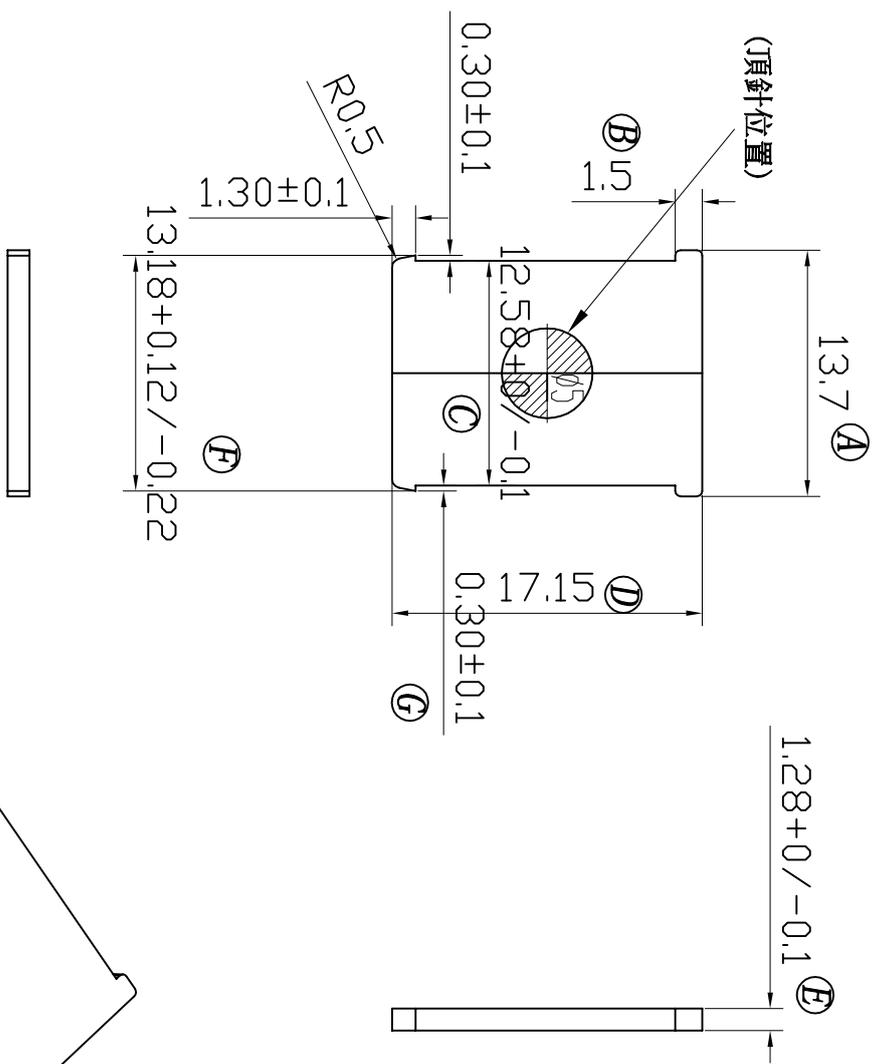

A	B	C	D	E	F	G
13.70	1.50	12.58	17.15	1.28	13.18	0.30
±0.2	±0.1	+0/-0.1	±0.3	+0/-0.1	+0.12/-0.22	+0.10/-0.10

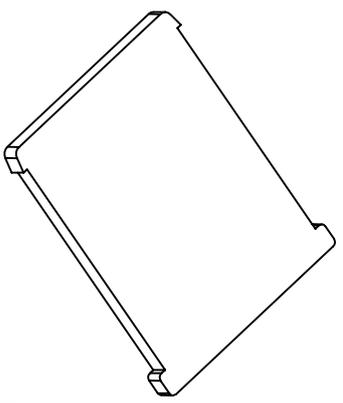

備註說明:

1. 材質: PBT-4130
2. 強度要求: 2.00kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 模具狀況: 量產模
6. HX-C020A與HX-C020B裝配OK

ROHS

NAME	T25X15X12 BASE	MATERIAL	PBT-4130	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX C020B	PIN MATERIAL		UNIT	m/m	REV.	02
TOLERANCE OF PIN PITCH		PIN TENSION LOAD		TOLERANCE: 0<L<4:±0.1		4<L<16:±0.20	
PBT-4130		kg MIN		16<L<...:±0.3		UL REC.: 94V0	
DRAWN & CHECKED BY		LIN HUA JING		APPROVED BY		LIN GUO PING	
DATE:		JUN 26 2016					

东莞市华欣塑胶制品有限公司
DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD.
TEL: 0769-86388188 FAX: 0769-86388111
E-Mail: hxbobbin@vip.163.com