


備註說明:

1. 材質: PM-9630
2. 強度要求: BASE凸點1.00kg MIN, 其他1.5kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊前拉力1.0kg MIN, 焊後拉力 1.5kg MIN
6. 模具狀況: 正式模

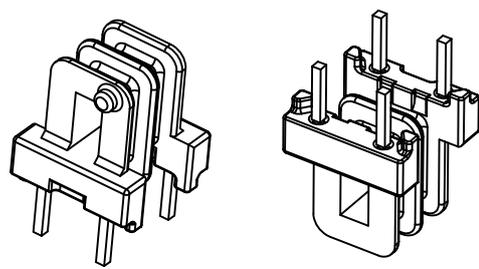

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EE-6.5(4P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX 0605	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05		 UL REC. :94V0			
		PIN TENSION LOAD 1.0 kgMIN					
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: MAR 19 2014	