
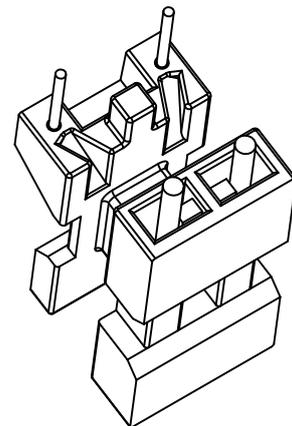
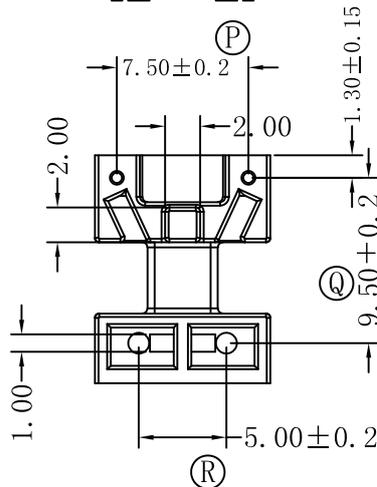
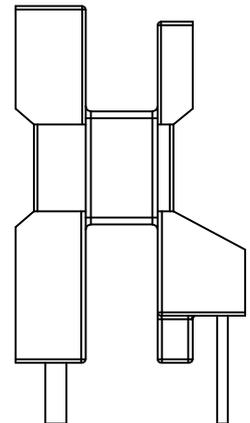
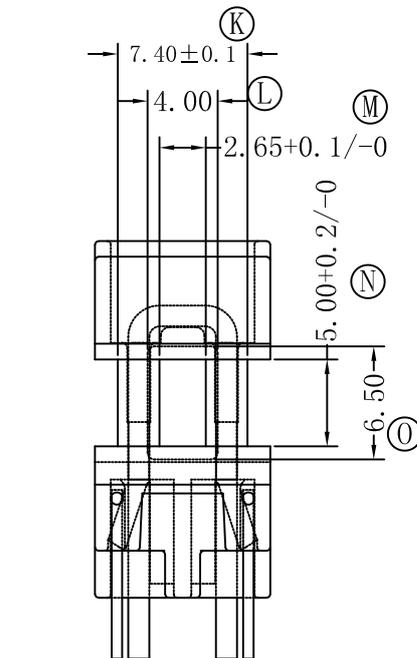
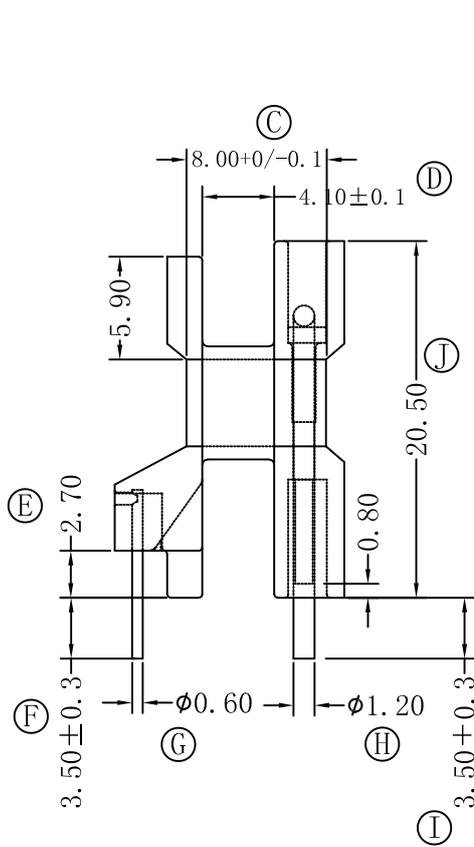
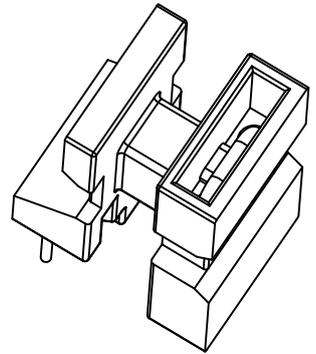



记号	日期	修改记录

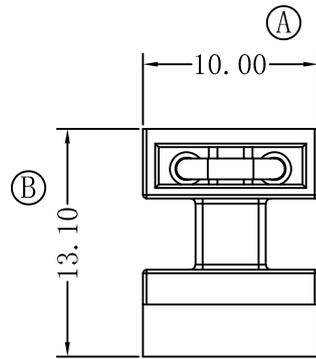

RoHS

備註:

1. U型針材質: CP WIRE 3/4H, $\phi 1.20$
2. 電鍍要求: Ni 1-2um, Sn 5-7um 霧錫

NAME	EE-10.2(4P)	MATERIAL	PBT-4130(100%)BK	SCALE	1:1	ANGLE	$\pm 1^\circ$
DRAWING NO.	HX 1044	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388188 FAX: 0769-86388111 E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN PITCH ± 0.20					
		PIN TENSION LOAD 1.0 kg MIN				UL REC. :94V0	
		TOLERANCE: $0 < L < 4: \pm 0.1$		$4 < L < 16: \pm 0.2$		$16 < L < 63: \pm 0.3$	
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY	LIN GUO PING	DATE:	MAY 13 2019		