
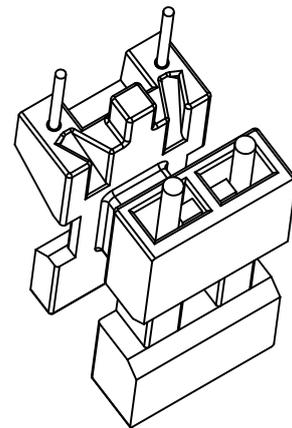
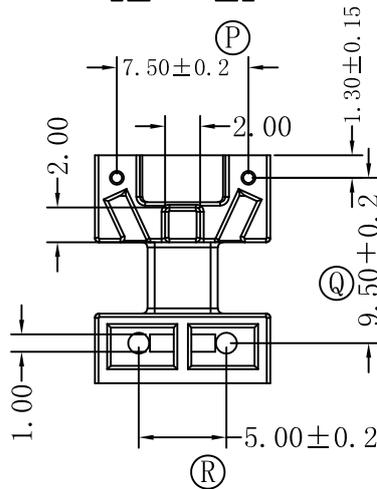
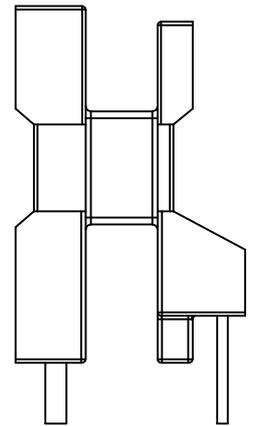
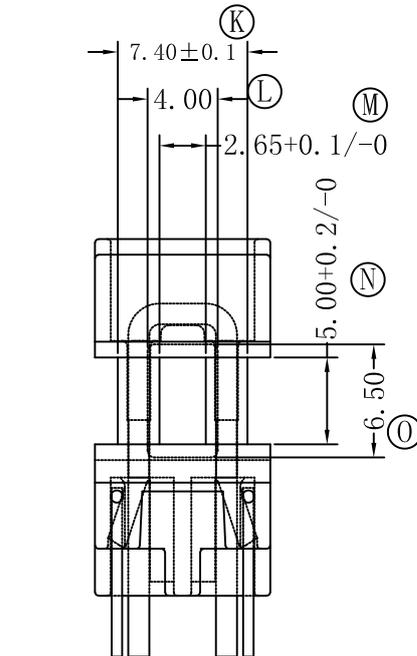
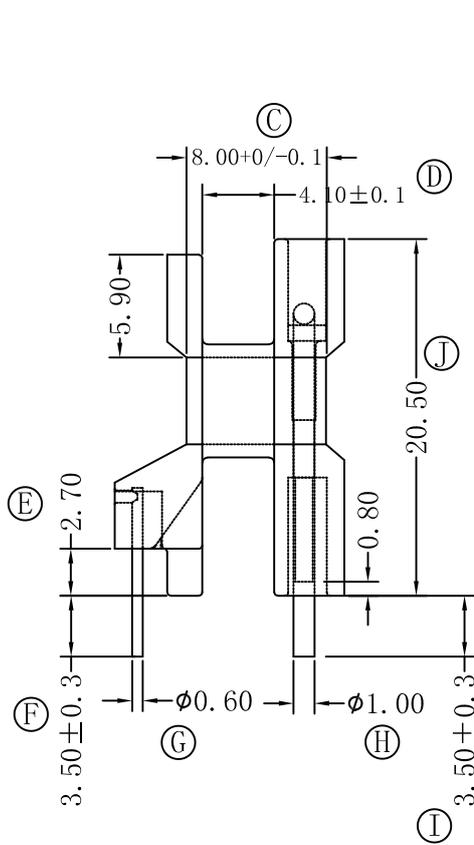
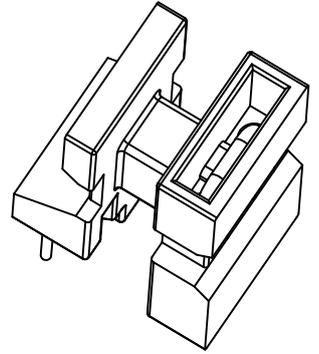
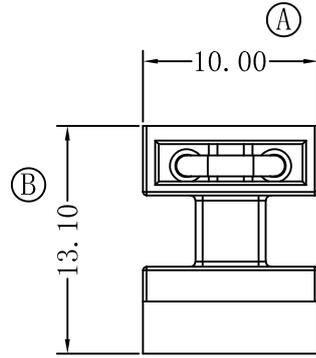


记号	日期	修改记录



RoHS

- 備註:
1. U型針材質: CP WIRE 3/4H,  $\phi 1.00$
  2. 電鍍要求: Ni 1-2 $\mu$ m, Sn 5-7 $\mu$ m 霧錫

NAME	EE-10.2(4P)	MATERIAL	PBT-4130(100%)BK	SCALE	1:1	ANGLE	$\pm 1^\circ$
DRAWING NO.	HX 1055	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
 <b>东莞市华欣塑胶制品有限公司</b> DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388188 FAX: 0769-86388111 E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN PITCH $\pm 0.20$					
		PIN TENSION LOAD 1.0 kg MIN				UL REC. :94V0	
		TOLERANCE: $0 < L < 4 : \pm 0.1$		$4 < L < 16 : \pm 0.2$		$16 < L < 63 : \pm 0.3$	
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY	LIN GUO PING	DATE:	NOV 05 2024		