





SECTION A-A

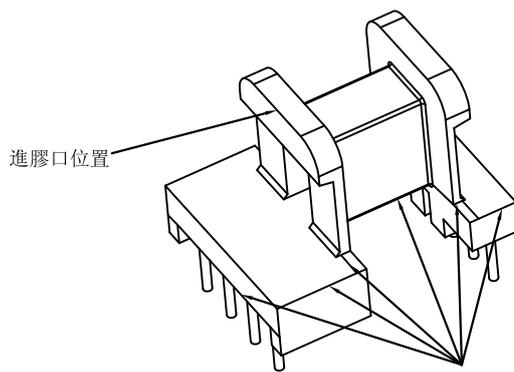


紅色線條是合模線位置

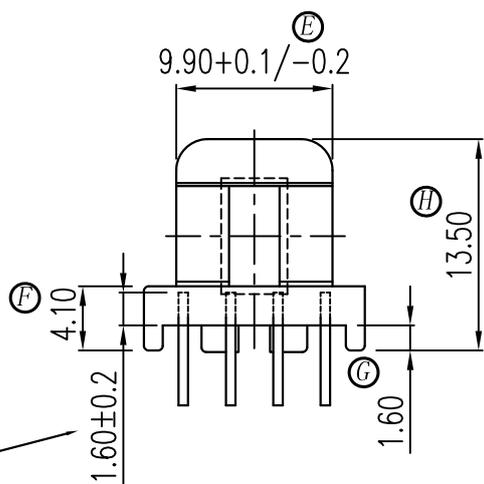

植PIN深度

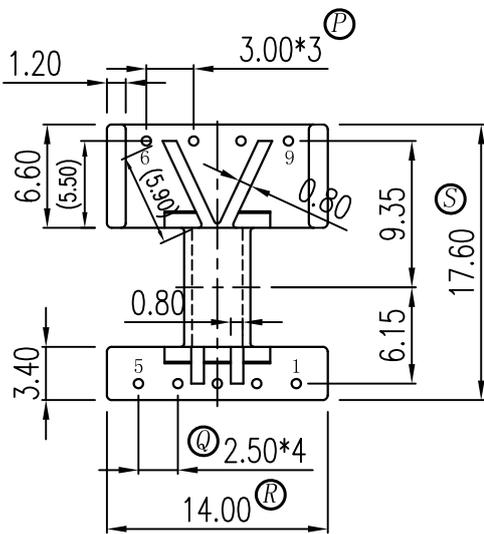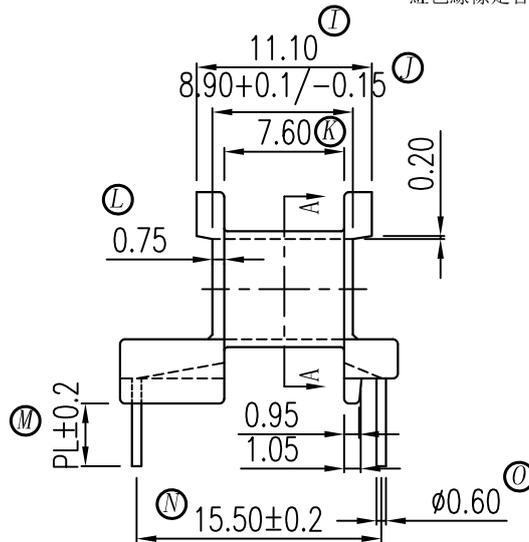

次級邊強度1.30kg MIN

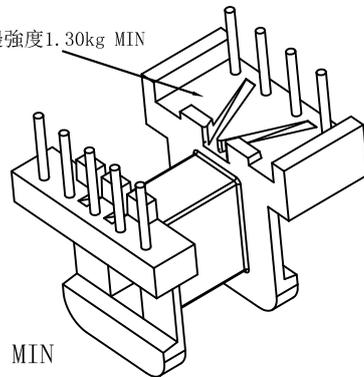

備註:

1. 材質: T375HF
2. 強度要求: 1.50kg MIN
3. 耐壓要求: 4KV/1.5mA/60S
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後拉力 1.5kg MIN
6. 模具狀況: 正式模

客户确认  
簽回

RoHS  
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	1. F, G, H尺寸由3.60, 1.10, 13.0改為4.10, 1.60, 13.5(mm).	2012/10/25	03		
02			04		

NAME	EE-13 (9P)	MATERIAL	T375HF	SCALE	2:1	ANGLE	±1°
DRAWING NO.	HX-1312	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01
		TOLERANCE OF PIN DIA ±0.05				UL REC. :94V0	
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		PIN TENSION LOAD 1.0 kg MIN		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		DRAWN & DRAFTED BY LIN HUA JING	
		CHECKED & APPROVED BY		DATE: OCT 25 2012			