





SECTION A-A

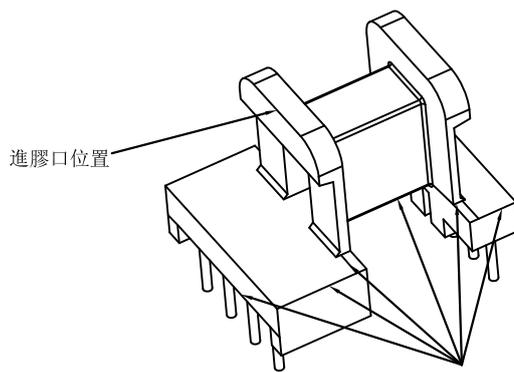


紅色線條是合模線位置

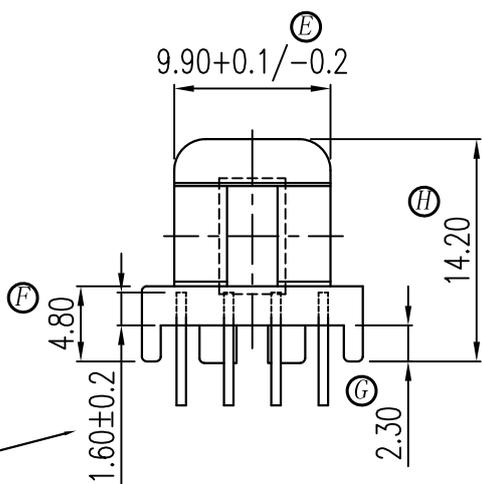

植PIN深度

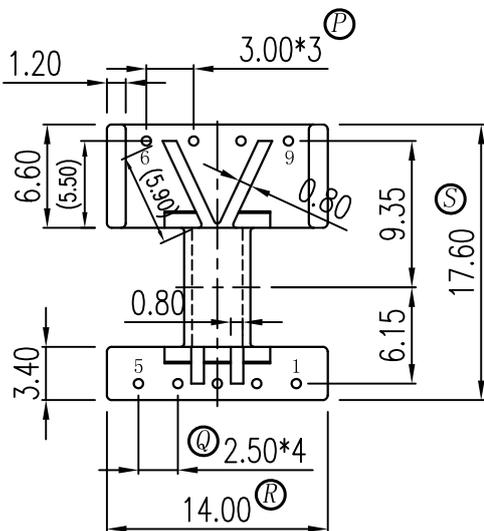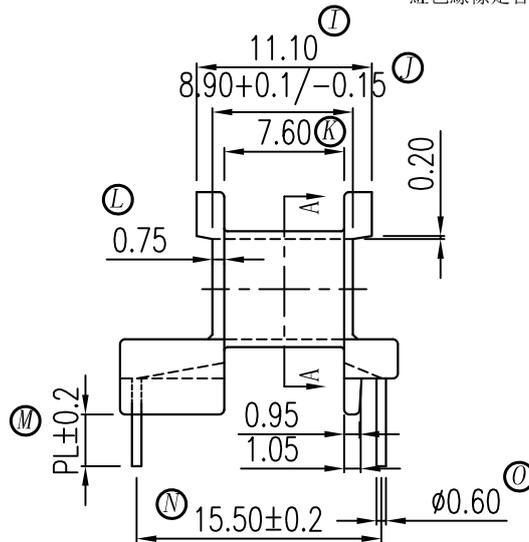

次級邊強度1.30kg MIN

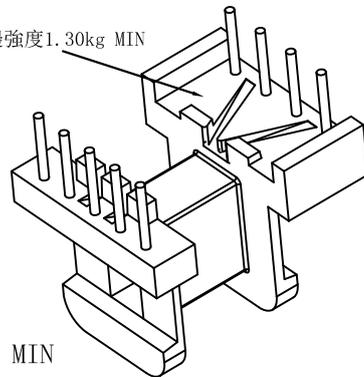

備註:

1. 材質: T375HF
2. 強度要求: 1.20kg MIN
3. 耐壓要求: 4KV/1.5mA/60S
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後拉力 1.5kg MIN
6. 模具狀況: 正式模

客户确认
簽回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EE-13 (9P)	MATERIAL	T375HF	SCALE	2:1	ANGLE	±1°
DRAWING NO.	HX-1344	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD 1.0 kg MIN		TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3		UL REC.: 94V0	
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY	DATE:	OCT 31 2022	