

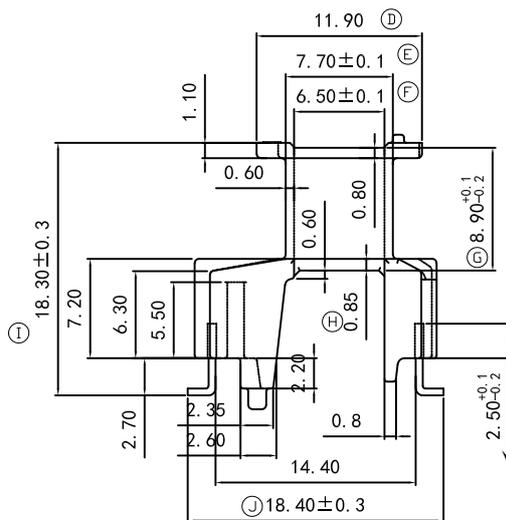



红色线条是合模线位置

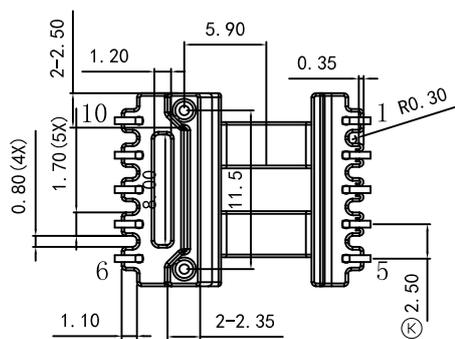

植PIN深度尺寸

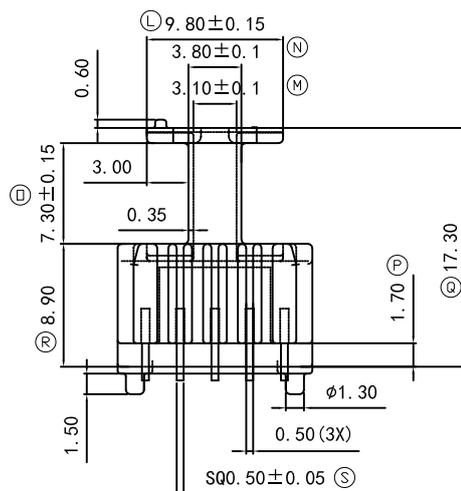

備註說明:

1. 材質: PM-9630
2. 強度要求: 2.00kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 焊錫後拉力: 1.50kg MIN
6. PIN切面不可露銅;PIN平貼度0.10mm MAX
7. 模具狀況: 量產模

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EE-1349 (10P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-1345	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ±0.05					
DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD.		PIN TENSION LOAD 1.0 kg MIN		UL REC. :94V0			
TEL:0769-86388088 86388188 86388288 FAX:0769-86388111		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3					
http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY		DATE:	May 27 2024