
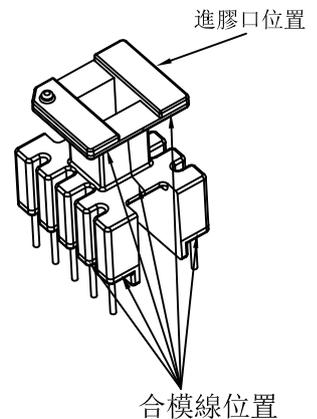


備註說明:

1. 材質: PM-9823
2. 強度要求: 1.50kg MIN, 其中PIN台強度是 1.00kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後拉力 1.50kg MIN
6. 模具狀況: 正式模



A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
11.30	5.60	4.40	10.00	3.25	2.00	8.20	19.70	13.10	6.30	5.20	0.80	PL	10.50	0.60	9.70	16.20	13.10
±0.2	±0.2	+0.2 -0.1	±0.2	±0.25	±0.1	±0.2	±0.3	±0.2	±0.2	+0.2 -0.1	±0.1	±0.2	±0.2	±0.05	±0.2	±0.3	±0.2

客户确认  
签回



REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	1. BASE线槽宽度由0.90mm改为1.20mm	2010/05/19	03		
02	1. E尺寸3.25±0.1改为3.25±0.25	2025/04/25	04		

NAME	EE-16 (10P)	MATERIAL	PM-9823	SCALE	3:1	ANGLE	±1°
DRAWING NO.	HX 1617	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	02
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05					
		PIN TENSION LOAD 1.0 kg MIN		UL REC. :94V0			
		TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3					
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: MAR 19 2010	