

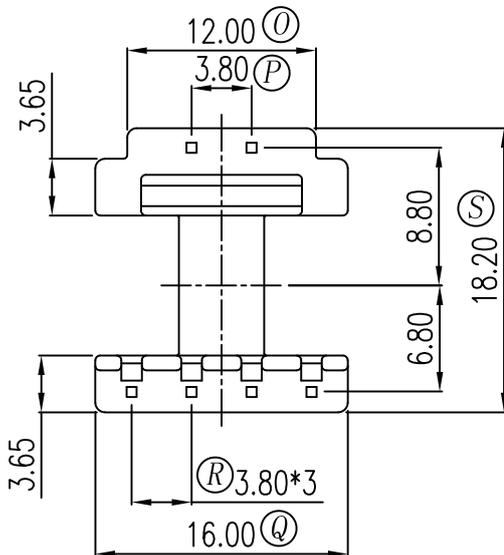
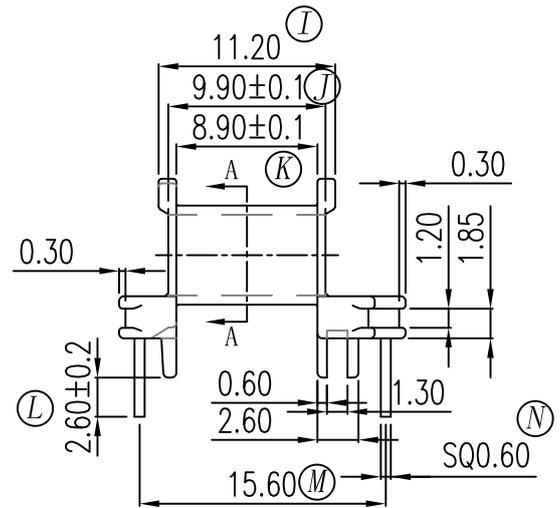
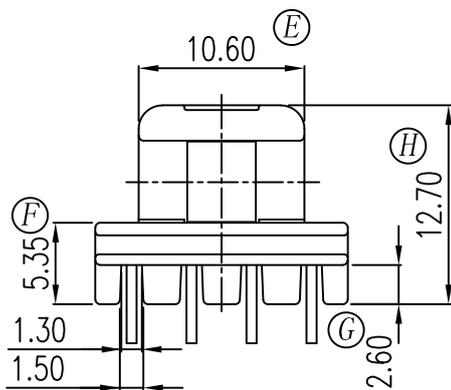


SECTION A-A



客户确认
签回

RoHS
HF

| | | | | | |
|------|-----------------|------|-----|-----------------|------|
| REV. | REVISION RECORD | DATE | REV | REVISION RECORD | DATE |
| 01 | | | 03 | | |
| 02 | | | 04 | | |

| | | | | | | | |
|--|------------|---|---------|-----------------------|-----|-------------------|-----|
| NAME | EE-16 (6P) | MATERIAL | PM-9820 | SCALE | 2:1 | ANGLE | ±1° |
| DRAWING NO. | HX 1618 | PIN MATERIAL | CP WIRE | UNIT | m/m | REV. | 00 |
| 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com | | TOLERANCE OF PIN DIA ±0.05 | | | | | |
| | | PIN TENSION LOAD 1.2 kg MIN | | UL REC. :94V0 | | | |
| | | TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3 | | | | | |
| DRAWN & DRAFTED BY | | LIN HUA JING | | CHECKED & APPROVED BY | | DATE: DEC 29 2008 | |