

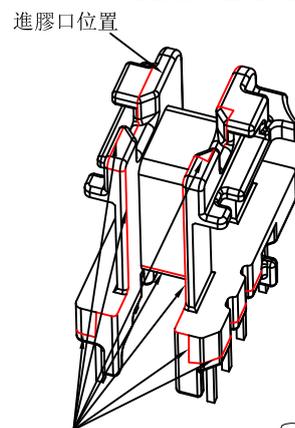
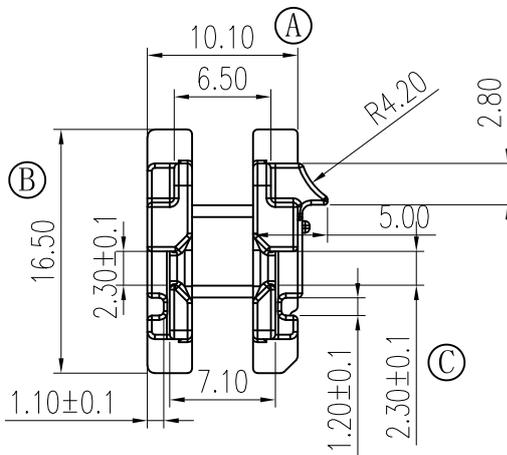

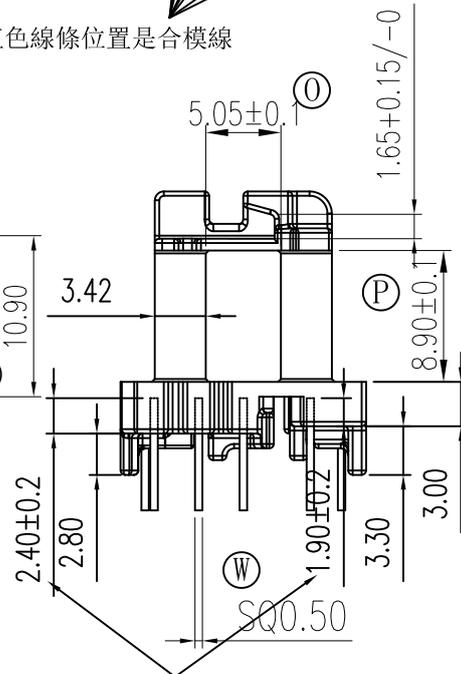




HX-1640A

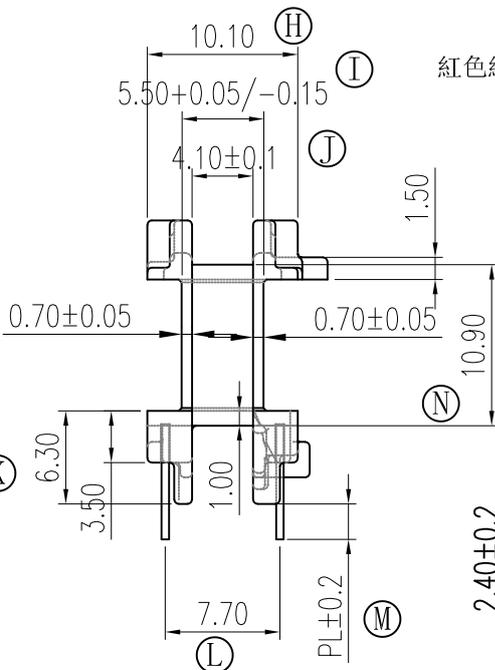

紅色線條位置是合模線

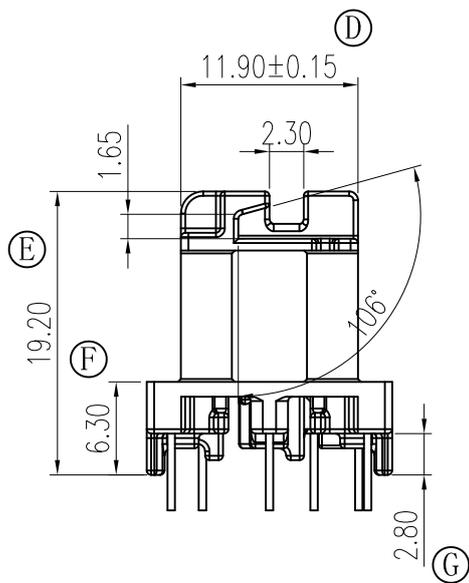

植PIN深度尺寸

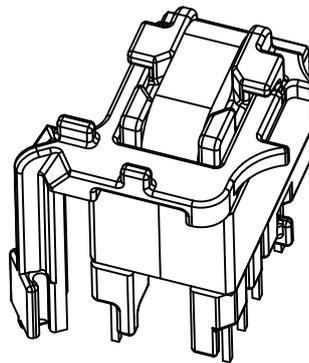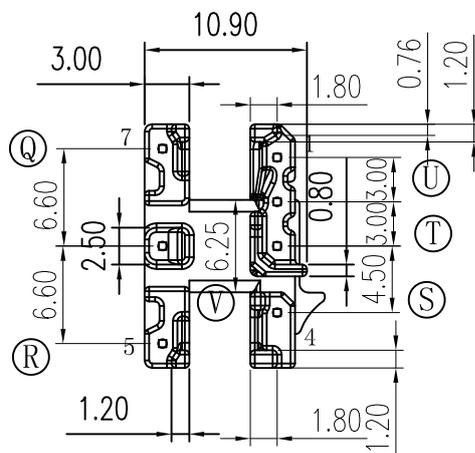

備註說明:

1. 材質: PM-9630
2. 強度要求: 1.50kg MIN, 凸點1.30kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後拉力 1.5kg MIN
6. 模具狀況: 量產模
7. PIN 1, 5, 7凸點高度是2.80; PIN 4凸點高度是3.30。

客户确认
簽回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EE-16 (4+3P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-1640A	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01
		TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD kg MIN TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3					
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY	DATE:	FEB 27 2019	