
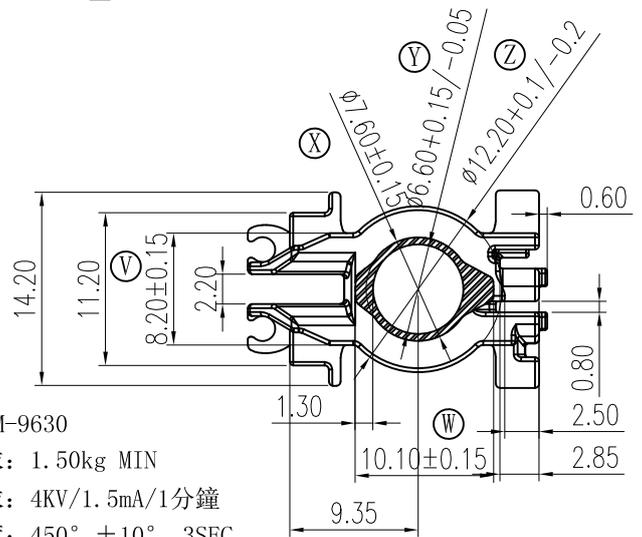
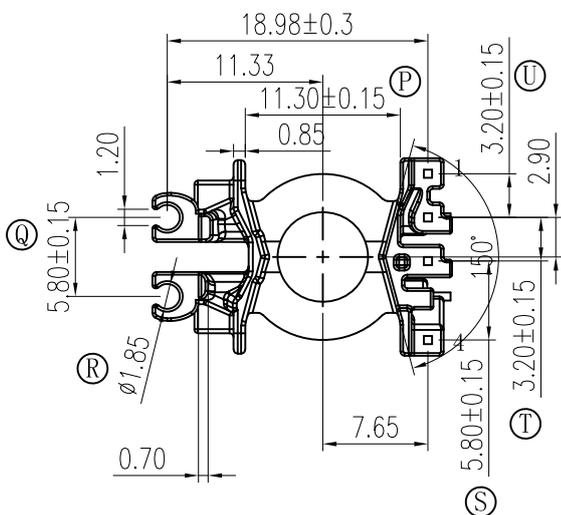
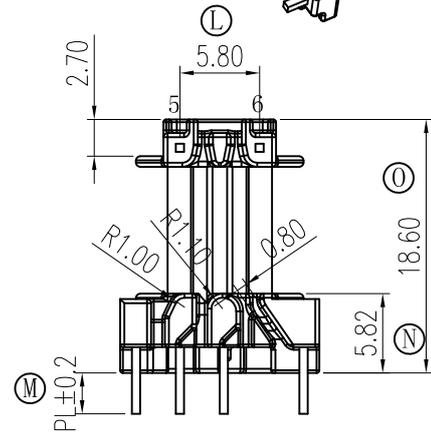


進膠口位置

紅色線位置是合模線

該PIN從根部量產起
焊前拉力: 1.0kg Min
焊後拉力: 1.5kg Min

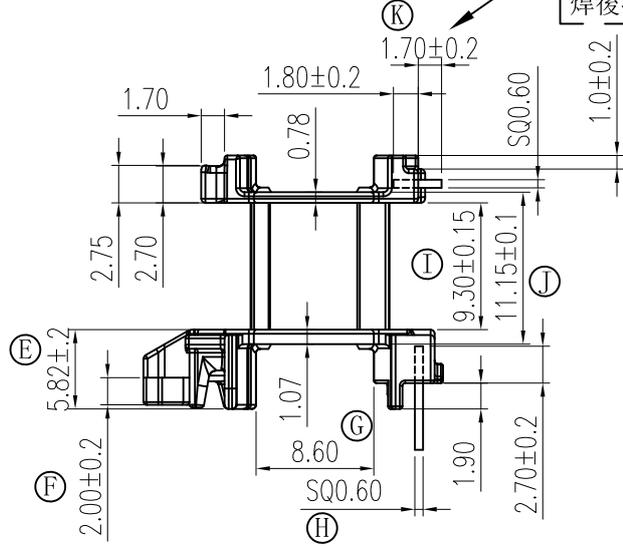

備註說明:

1. 材質: PM-9630
2. 強度要求: 1.50kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 焊錫後拉力: 2.0kg MIN (PIN5, 6除外)
6. 模具狀況: 量產模

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	RM-6 (4+2P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-0607	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD kg MIN TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		UL REC. :94V0			
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY	DATE:	OCT 08 2018	