




合模線位置

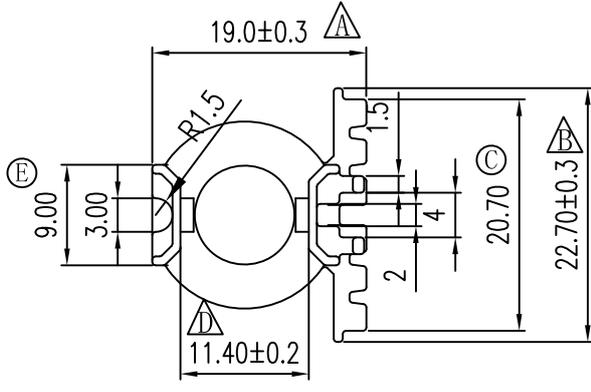

變更前圖示




變更後圖示





合模線位置



變更前圖示



變更後圖示

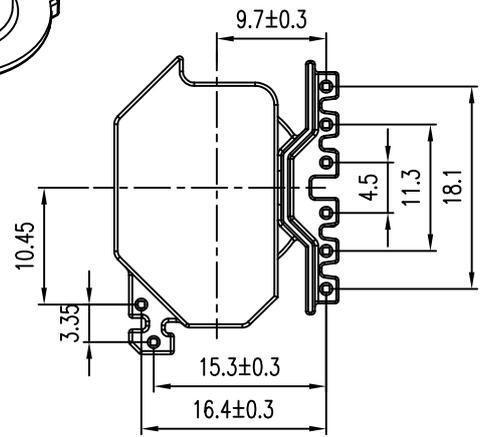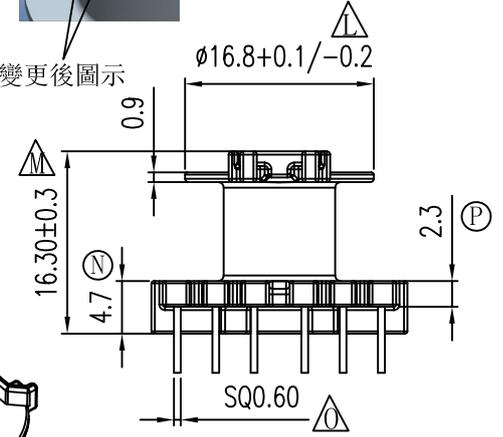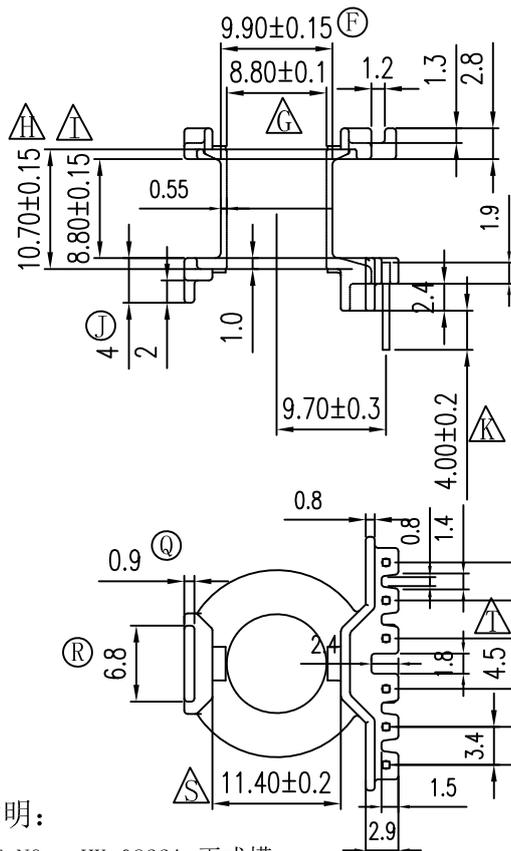

備註說明:

- PART NO. : HX-0822A 正式模
- MATERIAL: PM-9630 MUST MEET UL94V-0
- COLOR: BLACK
- CORE TYPE: RM-8
- MATERIAL OF PIN : 3/4H CP WIRE, SQ0.60±0.05
- DIMENSION MARK : \triangle MAIN DIM. \otimes SECOND DIM, OTHERWIRE ARE REFERENTIAL DIM. 标示的 \triangle 为重要尺寸, 标示的 \otimes 为次要尺寸。

- 強度要求: 1.50kg MIN
- 耐壓要求: 4KV/1.5mA/1分鐘
- 焊錫溫度: 450° ±10° 3SEC
- 拉力: 焊後拉力 1.5kg MIN
- HX-0822A與HX-0822B匹配OK

BOBBIN與CASE組合腳位尺寸圖

客户确认
簽回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	RM-8 (6P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-0822A	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD 1.0 kg MIN					
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3		UL REC. :94V0			
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: APR 02 2014	