
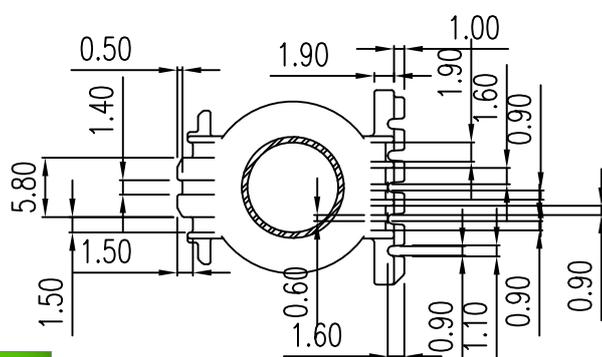



PIN咬花外露  
DETAIL B (2:1)

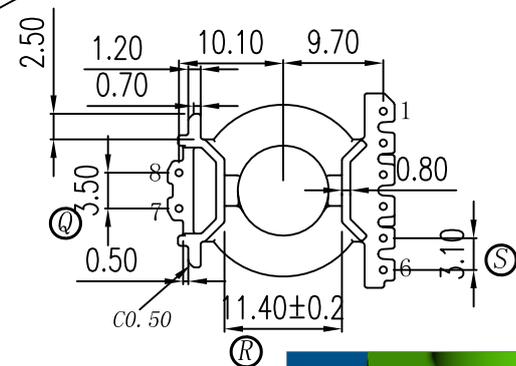

截面 A-A

備註說明:

1. 材質: PM-9630
2. 強度要求: 1.80kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後拉力 1.5kg MIN
6. 模具狀況: 量產模



客户确认  
签回

RoHS  
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	1. 两只PIN边BASE侧面增加凸点, 底部挡板加高0.50mm	2015/06/18	03	1. PIN7, 8边上线槽增加1.0*0.5凸台改為1.0*1.0凸台	2015/08/17
02	1. BASE侧面凸点由2.00改為2.50; PIN7, 8边上线槽寬度由1.30改為1.50; 线槽旁边增加1.0*0.5凸台	2015/07/07	04		

NAME	RM-8 (8P)	MATERIAL	PM-9630	SCALE	1/1	ANGLE	±1°
DRAWING NO.	HX-0824	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	03
		TOLERANCE OF PIN DIA ±0.05				UL REC. :94V0	
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		DRAWN & DRAFTED BY LIN HUA JING		CHECKED & APPROVED BY DATE: JUL 07 2015	