


# HX-0825A

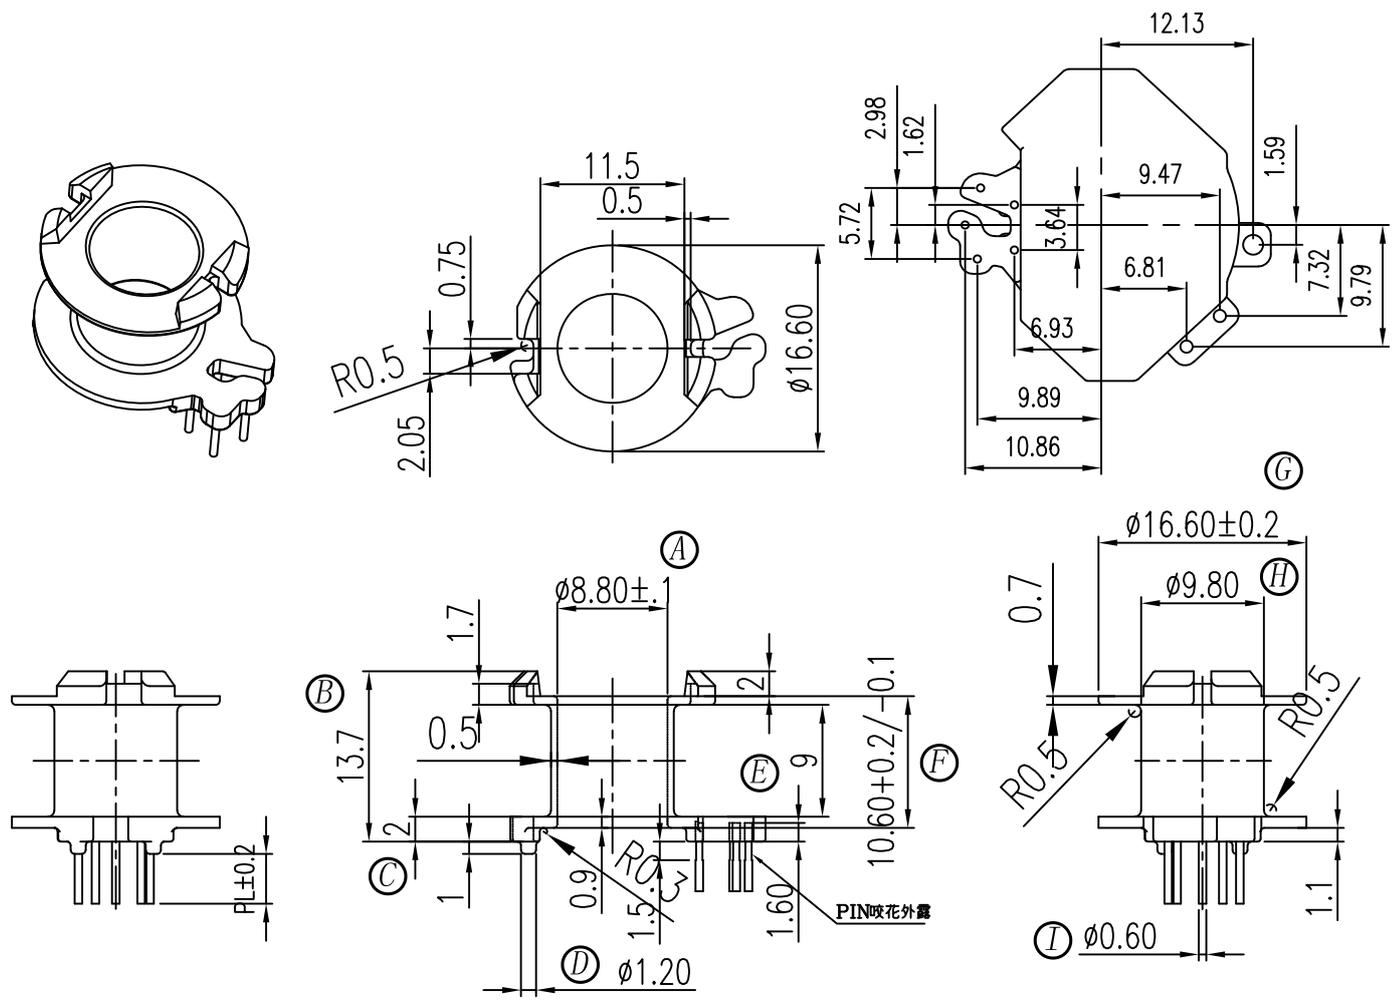

**備註說明:**

- PART NO. : HX-0825A
- MATERIAL: PM-9823 MUST MEET UL94V-0
- COLOR: BLACK
- CORE TYPE: RM-8
- 強度要求: 1.50kg MIN
- 耐壓要求: 4KV/1.5mA/1分鐘
- 焊錫後拉力: 1.50kg MIN
- 模具狀況: 量產模
- 與HX-0825B匹配OK

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
8.80	13.70	2.00	1.20	9.00	10.60	16.60	9.80	0.60	6.00	2.80	20.37	2.70	3.64	5.72	2.96	0.97
±0.1	±0.2	±0.1	±0.1	±0.2	-0.2 -0.1	±0.3	±0.2	±0.05	±0.2	±0.2	±0.3	±0.1	±0.1	±0.2	±0.1	±0.1

客户确认		RoHS HF
签回		

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	RM-8 (5P)	MATERIAL	PM-9823	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-0825A	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com	TOLERANCE OF PIN DIA		±0.05				
	PIN TENSION LOAD		kg MIN			UL REC. :94V0	
	TOLERANCE:		0<L≤4: ±0.1	4<L≤16: ±0.2	16<L≤63: ±0.3		
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY		DATE:	AUG 16 2016		