

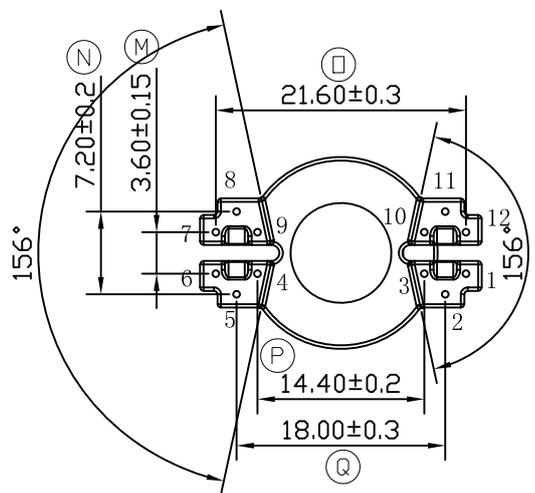
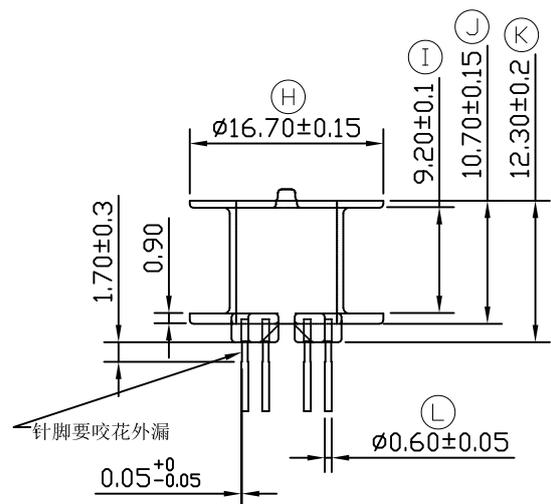


紅色線條位置是合模線

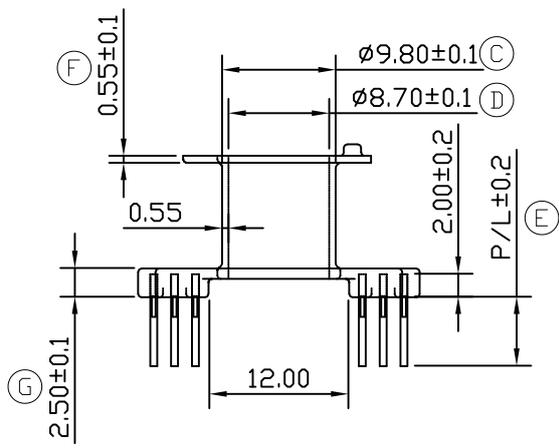

備註說明:

1. 強度要求: 1.5kg MIN
2. 耐壓要求: 4KV/1mA/3SEC
3. 焊錫溫度: 450° ±10° 3SEC
4. PIN拉力: 焊前1.0kg MIN; 焊後1.5kg MIN
5. 模具狀況: 量產模

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	RM-8B(12P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-0832	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05				UL REC. :94V0	
		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		DRAWN & DRAFTED BY		CHECKED & APPROVED BY	
		LIN HUA JING					