

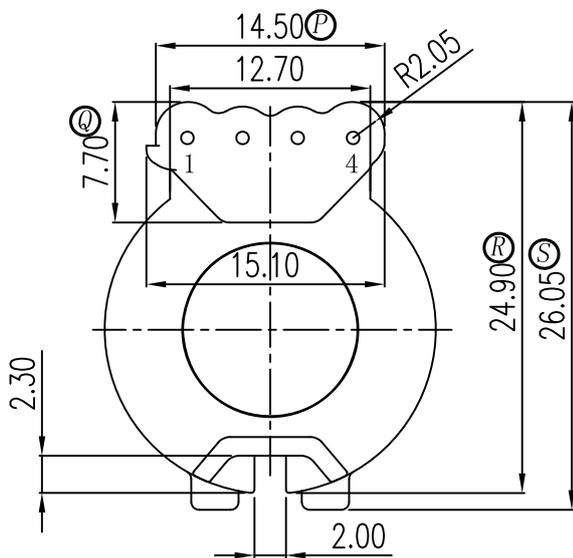
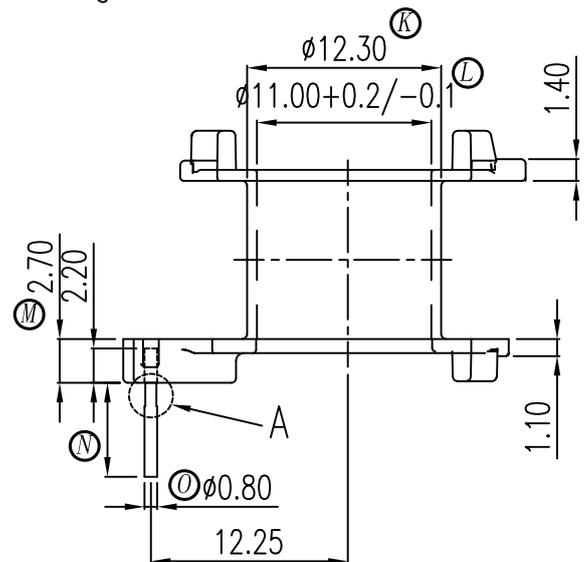
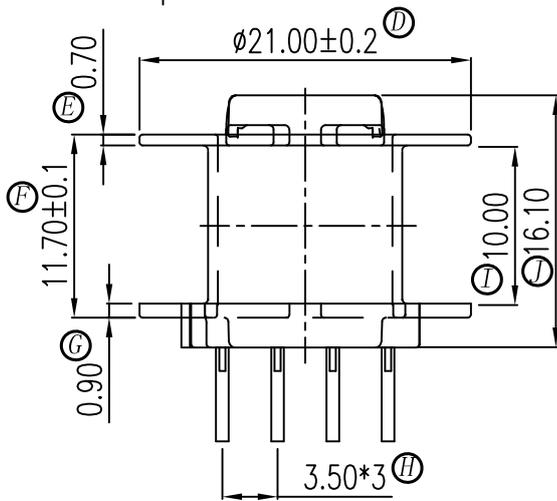
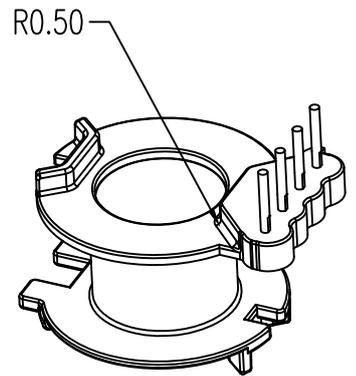
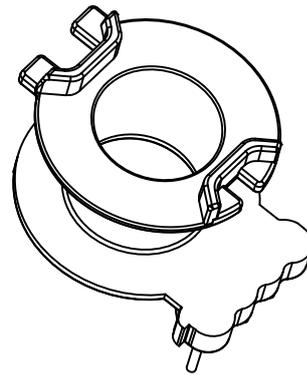


HX-1009A

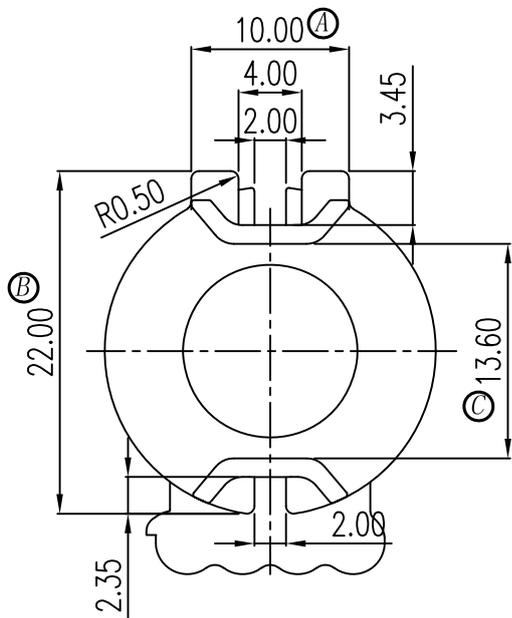

PIN咬花外露
DETAIL A(4:1)

客户确认
签回

RoHS
HF

| REV. | REVISION RECORD | DATE | REV | REVISION RECORD | DATE |
|------|---|------------|-----|-----------------|------|
| 01 | 1. TOP顶部耳朵叶片由1.10改为1.40(mm) | 2009/04/08 | 03 | | |
| 02 | 1. G, Q, R, S尺寸由0.8, 7.1, 24.5, 25.6改为0.9, 7.7, 24.9, 26.05 | 2012/10/17 | 04 | | |

| NAME | RM-10 (4P) | MATERIAL | PM-9820 | SCALE | 2:1 | ANGLE | ±1° |
|--|------------|---|---------|-----------------------|-----|-------------------|-----|
| DRAWING NO. | HX 1009A | PIN MATERIAL | CP WIRE | UNIT | m/m | REV. | 02 |
| | | TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD 1.5 kg MIN | | | | | |
| 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com | | TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3 | | UL REC.: 94V0 | | | |
| DRAWN & DRAFTED BY | | LIN HUA JING | | CHECKED & APPROVED BY | | DATE: OCT 17 2012 | |