

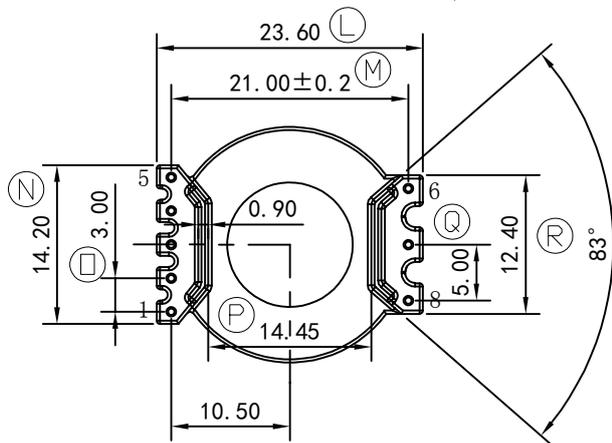
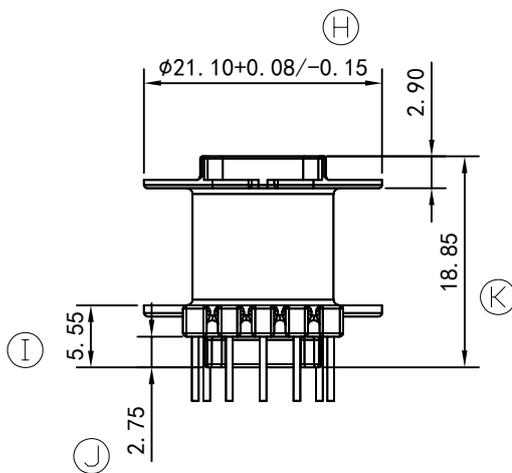


紅色線條是合模線位置

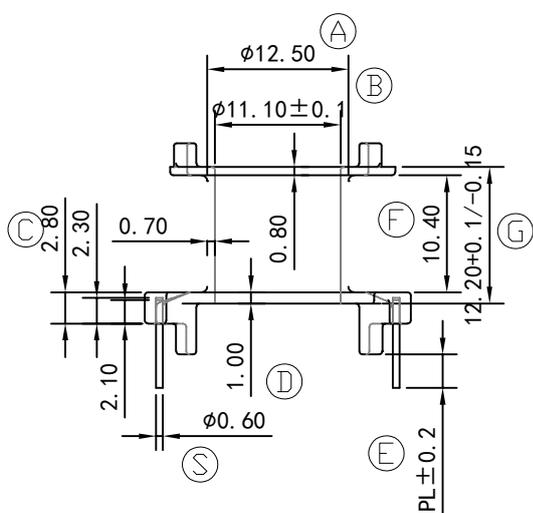

備註說明:

1. 材質: PM-9820
2. 拉力: 焊後是1.5kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: $450^\circ \pm 10^\circ$ 3SEC
5. 強度要求: 1.80kg MIN
6. 模具狀況: 量產模



客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	RM-10 (5+3P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	$\pm 1^\circ$
DRAWING NO.	HX-1047	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ± 0.05				PIN TENSION LOAD 1.5 kg MIN	
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE: $0 < L < 4: \pm 0.1$ $4 < L < 16: \pm 0.2$ $16 < L < 63: \pm 0.3$		UL REC.: 94V0		DATE: AUG 03 2020	
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY			