

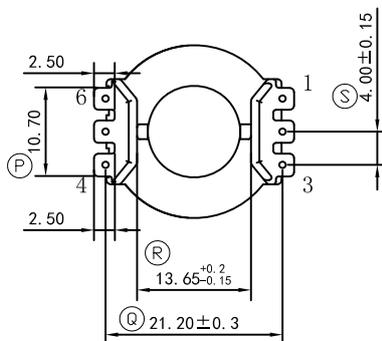

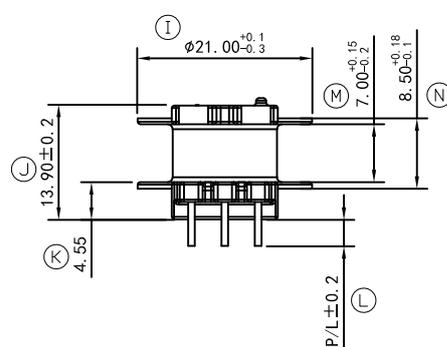


截面 A-A



|       |       |       |            |       |            |       |      |           |       |      |      |            |            |   |       |       |            |       |
|-------|-------|-------|------------|-------|------------|-------|------|-----------|-------|------|------|------------|------------|---|-------|-------|------------|-------|
| A     | B     | C     | D          | E     | F          | G     | H    | I         | J     | K    | L    | M          | N          | O | P     | Q     | R          | S     |
| 24.00 | 21.00 | 12.80 | 13.65      | 12.50 | 11.00      | 0.80  | 2.10 | 21.00     | 13.90 | 4.55 | PL   | 7.00       | 8.50       |   | 10.70 | 21.20 | 13.65      | 4.00  |
| ±0.3  | ±0.3  | ±0.2  | +0.2/-0.15 | ±0.2  | +0.2/-0.05 | ±0.05 | ±0.1 | +0.1/-0.3 | ±0.2  | ±0.2 | ±0.2 | +0.15/-0.2 | +0.18/-0.1 |   | ±0.2  | ±0.3  | +0.2/-0.15 | ±0.15 |

客户确认  
签回

RoHS  
HF

|      |                 |      |     |                 |      |
|------|-----------------|------|-----|-----------------|------|
| REV. | REVISION RECORD | DATE | REV | REVISION RECORD | DATE |
| 01   |                 |      | 03  |                 |      |
| 02   |                 |      | 04  |                 |      |

|             |            |              |         |       |     |       |     |
|-------------|------------|--------------|---------|-------|-----|-------|-----|
| NAME        | RM-10 (6P) | MATERIAL     | PM-9823 | SCALE | 1:1 | ANGLE | ±1° |
| DRAWING NO. | HX-1052    | PIN MATERIAL | CP WIRE | UNIT  | m/m | REV.  | 00  |



东莞市华欣塑胶制品有限公司  
DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD.  
TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111  
http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com

|                      |  |                       |
|----------------------|--|-----------------------|
| TOLERANCE OF PIN DIA | ±0.05  |                       |
| PIN TENSION LOAD     | 1.0 kg MIN                                   | UL REC. : 94V0        |
| TOLERANCE:           | 0<L≤4: ±0.1    4<L≤16: ±0.2    16<L≤63: ±0.3 |                       |
| DRAWN & DRAFTED BY   | LIN HUA JING                                 | CHECKED & APPROVED BY |
| DATE:                | June 03 2024                                 |                       |