
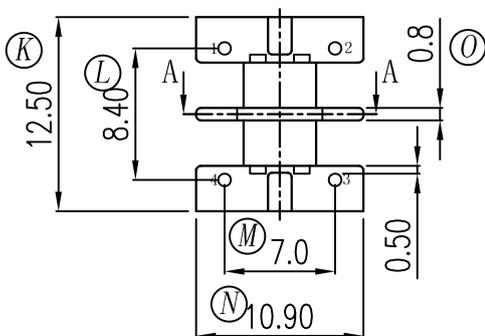
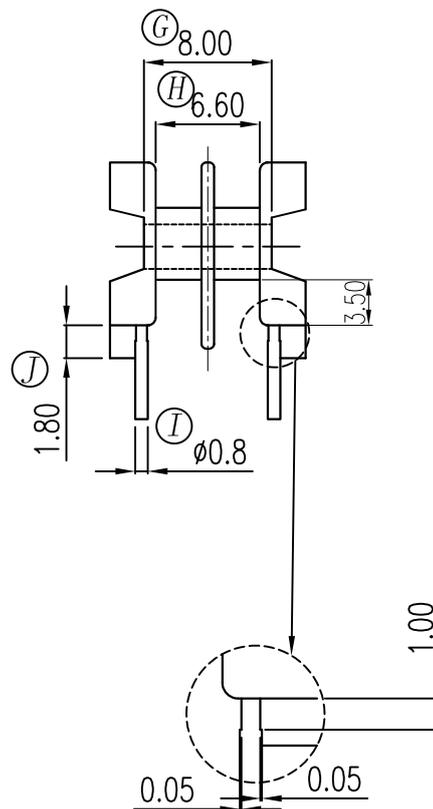
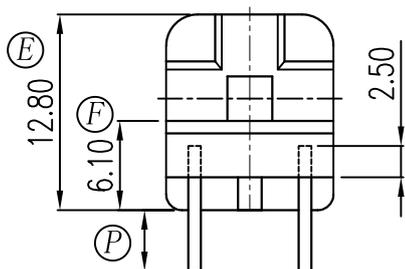


SEC. A-A



備註說明:

1. 模具狀況：正式模
2. 耐壓要求：4KV/1.5mA/1分鐘

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	UU-9.8(4P)	MATERIAL	T375HF	SCALE	2:1	ANGLE	±1°	
DRAWING NO.	HX 0909	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00	
 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05				PIN TENSION LOAD 1.0 kg MIN		UL REC. :94V0
		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		DRAWN & DRAFTED BY		LIN HUA JING	CHECKED & APPROVED BY	