


PIN咬花外露
DETAIL A(2:1)

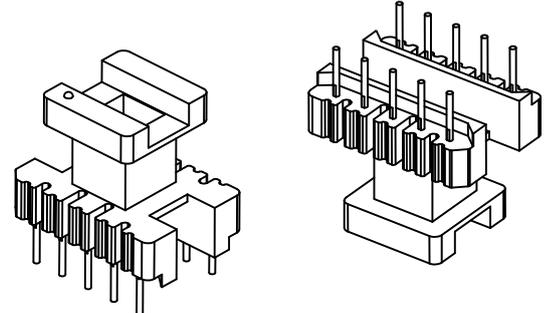

備註說明:

1. PART NO. : HX-2214 正式模
2. MATERIAL: PM-9820 MUST MEET UL94V-0
3. COLOR: BLACK
4. CORE TYPE: EI-22
5. MATERIAL OF PIN : 3/4H CP WIRE, 圓0.70±0.05
6. 強度要求: 1.80kg MIN
7. 耐壓要求: 4KV/1.5mA/1分鐘
8. 焊錫溫度: 450° ±10° 3SEC
9. 拉力: 焊後拉力 1.5kg MIN

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
13.50	8.10	6.40	6.70	4.00	8.55	18.00	1.70	13.70	8.10	6.30	32.00	12.00	10.20	0.70	22.00	15.80	
±0.2	±0.2	±0.1	±0.2	±0.1	±0.2	±0.3	±0.1	±0.2	±0.2	±0.1	±0.3	±0.2	±0.15	±0.05	±0.3	±0.2	

客户确认		RoHS HF
签回		

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EI-22 (10P)	MATERIAL	PM-9820	SCALE	2:1	ANGLE	±1°
DRAWING NO.	HX-2214	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05				UL REC. :94V0	
		TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3				DRAWN & DRAFTED BY	
		LIN HUA JING					